

# CORTO

Design: ECLATEC

ECLATEC

ASSEMBLED BY FOS LIGHTING





Configuration

CORTO LIN (on request)  
CORTO bracket  
Outreach 500 mm  
Column height: 6 m



Configuration

CORTO LIN (on request)  
CORTO bracket  
Outreach 500 mm  
Column height: 4 m



Configuration

CORTO LIN (on request)  
CORTO wall bracket  
Outreach 500 mm

Configuration

CORTO VENGA (on request)  
CORTO bracket  
Outreach 500 mm  
Tilted column  
Column height: 6 m

# CORTO

Design: ECLATEC



CORTO  
Without decorative design


## DESCRIPTION\*

Product name	CORTO
Housing	Spun aluminium, requires tools to open
Decorative design	Available as option
Bowl	Polycarbonate
Finish	Polyester powder coating: Signal Black (RAL9004), Grey Aluminium (RAL9007), Traffic White (RAL9016), Anthracite Grey (RAL7016)
Impact protection	IK10
Ingress Protection	IP66 Extruded silicone gasket Breathing system with activated carbon filter
Dimensions (dia x h)	415 x 140 mm
Weight	5.9kg
Windage area	0.04m <sup>2</sup>
Watts/lumens	<a href="#">Click to view</a>

\*Data shown is for standard assembled products within Australia. For all product specifications please view the ECLATEC Website.

## DIMENSIONS

CORTO



## SOURCES & PHOTOMETRIC DISTRIBUTIONS\*

	CORTO
Sources	ZEDLED1
Colour temperature	3000K or 4000K
Optical Distribution	QUADRALENS: ERS, ERL, ECA, LRS, LRL, ERE, ETS, PFA, EPD, EPG
Backlight shield option	Medium or strong cut-off, on request
Power supply current	Adjustable up to 700 mA <sup>(1)</sup>

(1) >700mA possible on request E/L/P: Lighting/Luminance/Projection, R/C/T/F/P: Road/Circular/Pavement/Beam/Zebra crossing, E/S/L/A/D/G: Narrow/Standard/Wide/Asymmetrical/Right/Left


\*Data shown is for standard assembled products within Australia. For all product specifications please view the ECLATEC Website.



ZEDLED 1 module

## OPTICAL DISTRIBUTION

### CORTO

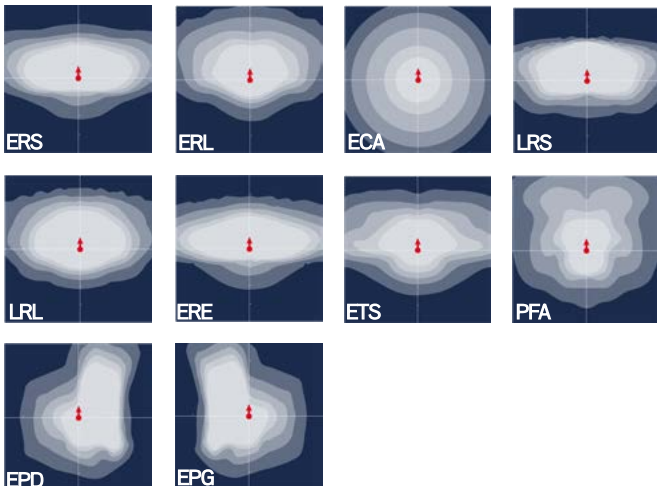

## MECHANICAL INTERFACE



Suspended with Ø 27 PDG swivel joint for female bossing welded to the bracket

Additional options and configurations available

## CONTROL OPTIONS

CORTO by Eclatec delivers advanced control across both centralised and decentralised architectures. The luminaire is supplied with DALI interfaces as standard, ensuring system compatibility.

## MAINTENANCE

Electric equipment maintenance

Separate ZEDLED 1 module.

